
BLAUAIR RP

CEILING MOUNTED HEAT RECOVERY UNITS

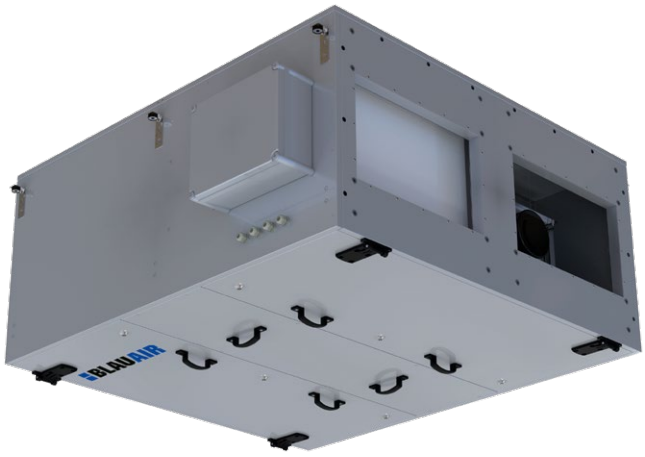

FEATURES

High-efficiency rotary heat exchanger available in two types: condensing (aluminium) and enthalpy.


High-efficient EC fans, backward-curved, external rotor. Integrated plug-and-play controls.

Web interface, MODBUS, outputs for optional electric/water heater or water/freon cooler.


Complete set of accessories: silencers, economizers, VAV, CAV, etc.

Operation by RH/CO_2/temperature/constant pressure/timer schedule.

Best suited for: light commercial buildings, educational facilities, offices, and retail spaces. Indoor installation.

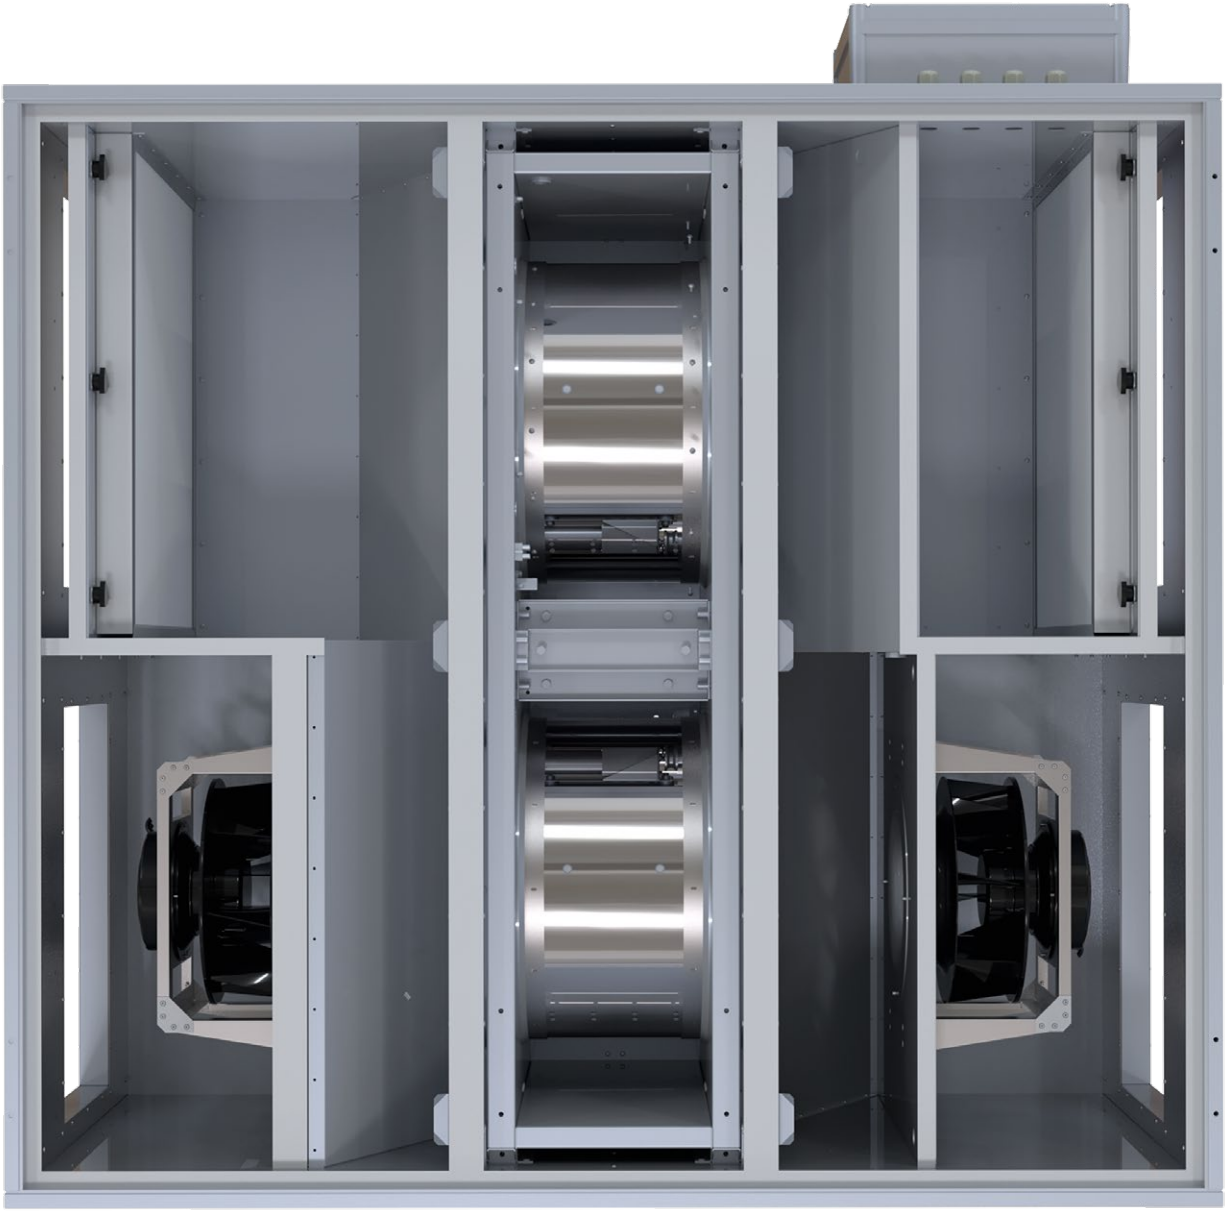

Sizes and capacities of BL and BLS Compact units

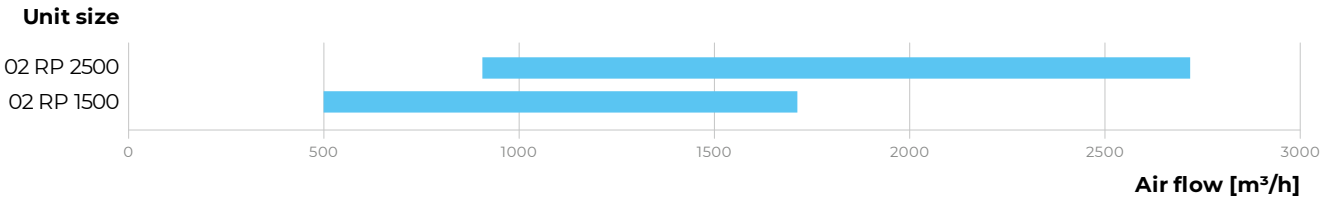

External pressure drop – 200 Pa

Connection dimensions [mm]

Unit size	02 RP 1500	02 RP 2500
Width × Height	500×300	500×300