



Quatro 100 ST


Extract fans with decorative front panel

- Maximum airflow: 88
- Sound pressure level LpA at 3 m: 33
- Motor type: AC
- Pull cord
- Timer: Turn off timer


| | Unit of measurement | Quatro 100 ST |
|---------------------------------|---------------------|---------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 14 |
| Unit current | A | 0.085 |
| Maximum airflow | m ³ /h | 88 |
| Sound pressure level LpA at 3 m | dB(A) | 33 |
| Ingress protection rating | - | IP34 |

Dimensions

| a | a1 | b | c | Ø d | e |
|-----|-----|-----|-----|-----|----|
| 171 | 151 | 108 | 128 | 100 | 32 |

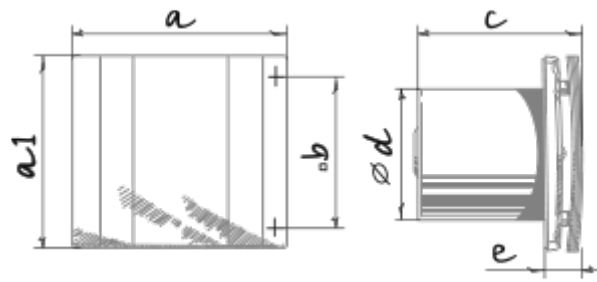

Ecodesign

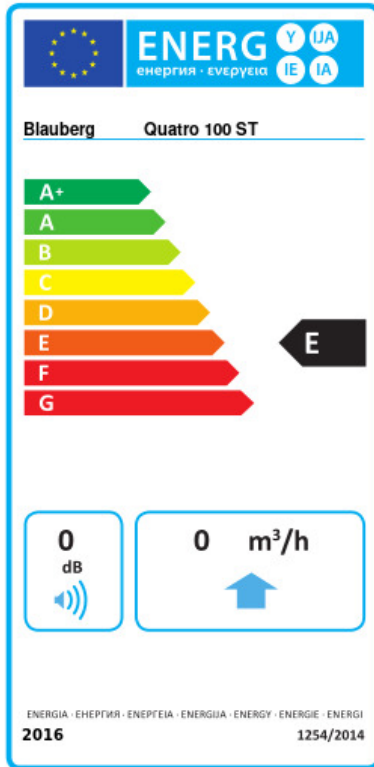

| | | | |
|--|----------------|---------|------|
| Trademark | Blauberg | | |
| Model | Quatro 100 ST | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | Average | Warm |
| | 0 B | 0 E | 0 F |
| Type of ventilation unit | Unidirectional | | |
| Type of drive installed | Multi-speed | | |
| Type of heat recovery system | None | | |
| Maximum flow rate (m³/h) | 0 | | |
| Electric power input (W) | 0 | | |
| Reference flow rate (m³/s) | 0 | | |
| Specific power input (SPI) (W/(m³/h)) | 0 | | |
| Control typology | Manual control | | |
| Maximum external leakage rates (%) | 0 | | |
| Sound power level (dB(A)) | 0 | | |
| Declared typology | RVU UVU | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | Average | Warm |
| | 0 | 0 | 0 |
| The annual heating saved (AHS) (kWh/a) | Cold | Average | Warm |
| | 0 | 0 | 0 |