


Tower-H EC 250

Roof centrifugal fans with EC motor



- Maximum airflow: 1470
- Sound pressure level LpA at 3 m: 54
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel

| | Unit of measurement | Tower-H EC 250 |
|--|---------------------|----------------|
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 161 |
| Unit current | A | 1.29 |
| Maximum airflow | m ³ /h | 1470 |
| Sound pressure level LpA at 3 m | dB(A) | 54 |
| Weight | kg | 13 |
| Transported air temperature (max) | °C | 60 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |
| Ingress protection rating of the drive | - | IP55 |

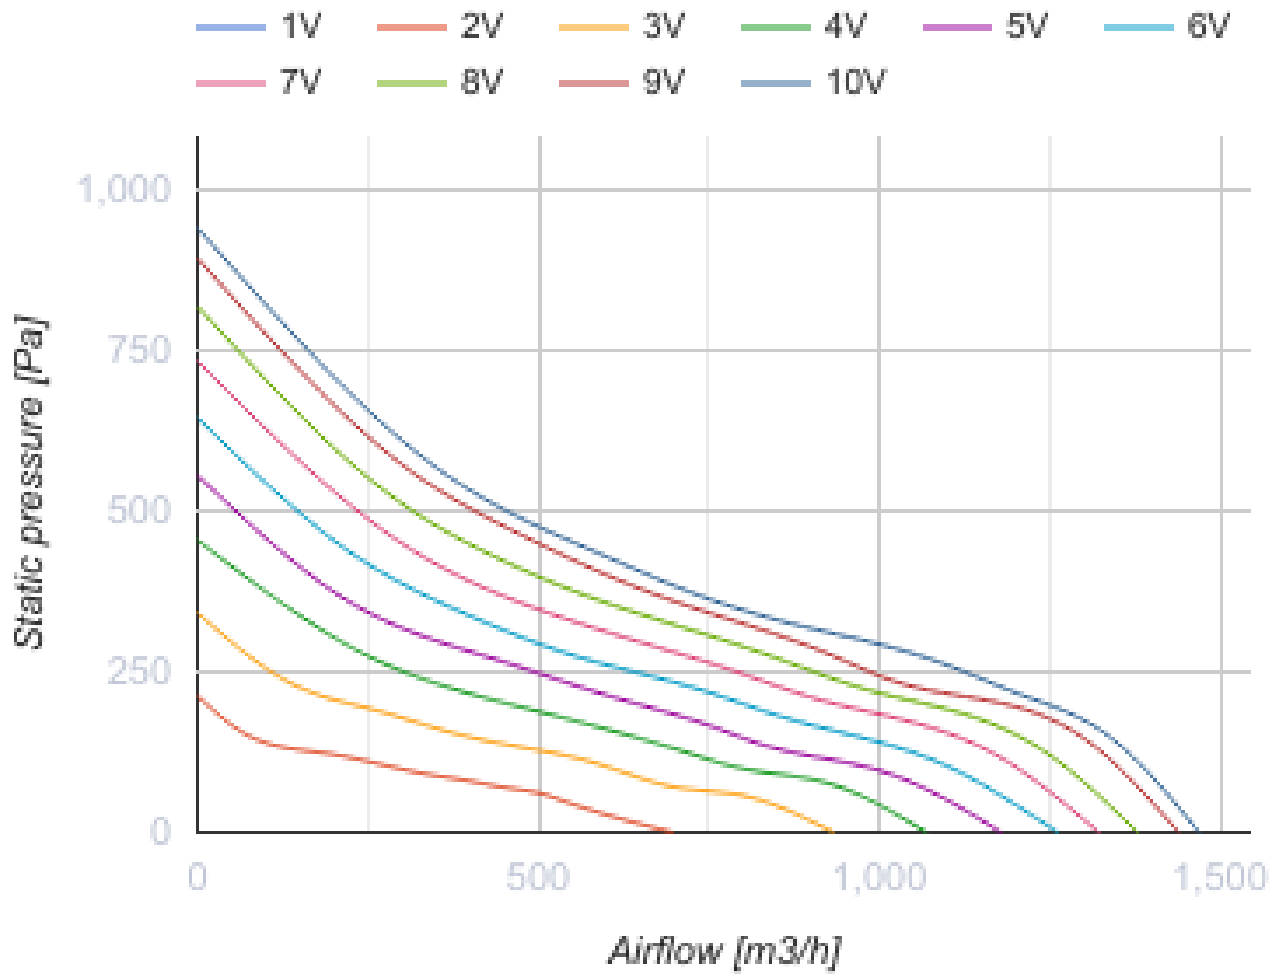

Dimensions

| ØD | Ød | H | L | L1 | L2 |
|-----|----|-----|-----|-----|-----|
| 213 | 11 | 234 | 350 | 245 | 351 |



Ecodesign

| | |
|---------------------------------------|----------------|
| Trademark | Blauberg |
| Model | Tower-H EC 250 |
| Type of ventilation unit | Unidirectional |
| Type of drive installed | Integrated VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 0.336 |
| Nominal external pressure (Pa) | 606 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 47.6 |
| Declared typology | NRVU UVU |
| Sound power level (dB(A)) | 67 |
| Effective electric power input (kW) | 0.485 |

Accessories

Other accessories

| Name | Photo | Description |
|----------------------------|---|-----------------------------|
| CDT E/0-10 |  | Speed control for EC motors |