

Trio V2 150 TR

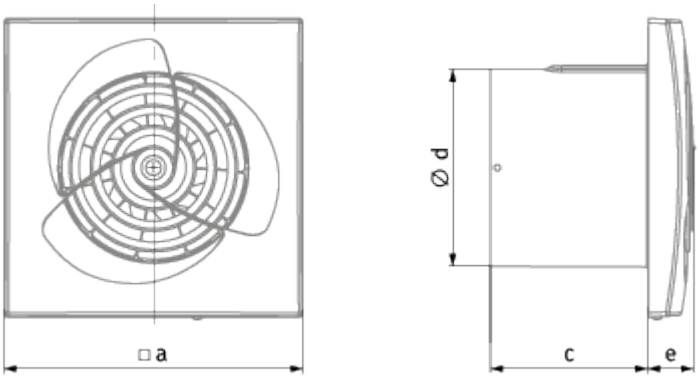
Low noise extract axial fan

- Sound pressure level LpA at 3 m: 35
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Timer: Turn off timer, Turn on timer

	Unit of measurement	Trio V2 150 TR	
Speed	-	1	2
Connected air duct size	mm	150	
Maximum supply voltage	V	240	
Minimum supply voltage	V	220	
Power supply frequency	Hz	50	
Rated power	W	18	21
Unit current	A	0.079	0.085
Maximum airflow	m^3/h	210	300
Sound pressure level LpA at 3 m	dB(A)	29	35
Weight	kg	0.97	
Ambient air temperature min	°C	1	
Ambient air temperature max	°C	40	
Ingress protection rating	-	IP44	
Impeller material	-	Plastic	

Dimensions

a	c	Ø d	e
206	100	148	23


□a
Ø d
c
e

Ecodesign

Trademark	Blauberg					
Model	Trio V2 150 TR					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-34.1	A	-16.2	E	-6	F
Type of ventilation unit	Unidirectional					
Type of drive installed	2-speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	300					
Electric power input (W)	21					
Reference flow rate (m³/s)	0.058					
Specific power input (SPI) (W/(m³/h))	0.086					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	49					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	101		101		101	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	